


PLAN
NTS

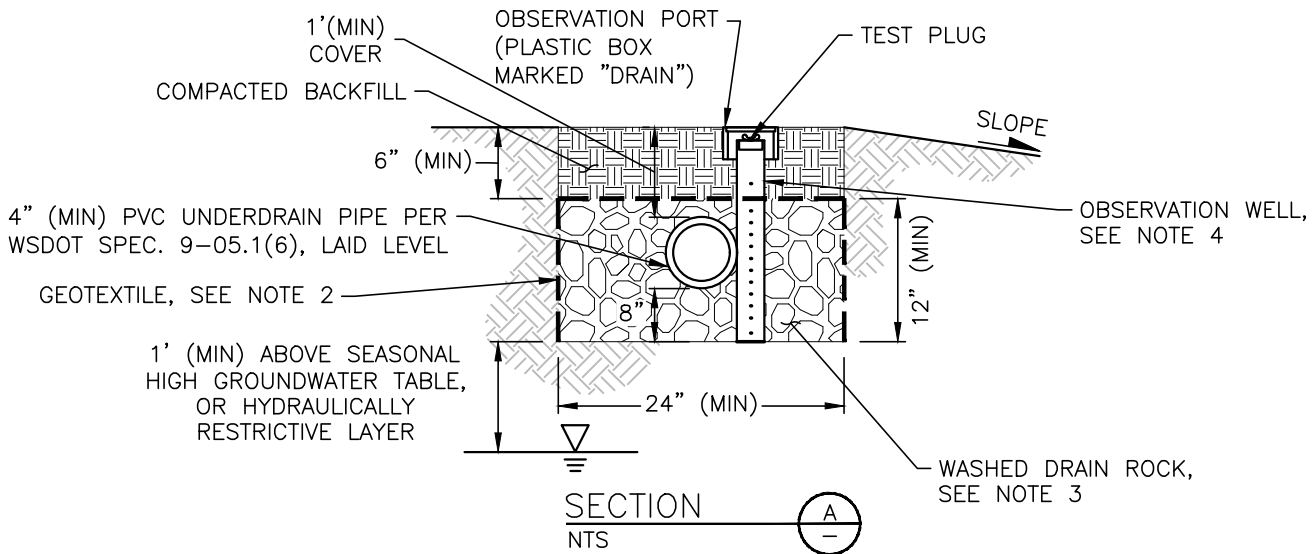


SECTION
NTS

GENERAL NOTES:

1. REFER TO THE 2017 CITY OF EDMONDS STORMWATER ADDENDUM FOR SETBACK (CHECKLIST 15) AND INFEASIBILITY REQUIREMENTS.
2. TRENCH LENGTH TO BE 10 FEET IN LENGTH FOR EVERY 5,000 SQUARE FEET OF CONTRIBUTING ROOF AREA.

NOTES:

1. CLEANOUTS RECOMMENDED AT PIPE BENDS AND ONE END OF THE PERFORATED PIPE SECTION.
2. GEOTEXTILE SHALL CONFORM TO WSDOT SPEC. 9-33.2(1), GEOTEXTILE FOR SEPARATION, NON-WOVEN TYPE.
3. WASHED DRAIN ROCK SHALL CONFORM TO WSDOT SPEC. 9-03.12(5), GRAVEL BACKFILL FOR DRYWELLS.
4. OBSERVATION WELL SHALL CONFORM TO WSDOT SPEC. 9-05.2(6), PERFORATED PVC UNDERDRAIN PIPE.



CITY OF EDMONDS
PUBLIC WORKS
DEPARTMENT

**TYPICAL PERFORATED
STUB-OUT CONNECTION**

APPROVED BY: R. ENGLISH

REVISION DATE
APRIL 2021

STANDARD
DETAIL
SD-639