


- THE FORCE MAIN.
- 2. THE LOCATION OF THE STUB SERVICE TERMINATION SHALL BE MARKED BY THE CONTRACTOR WITH A 2"x4" TIMBER EXTENDED VERTICALLY FROM THE PLUG END TO A MINIMUM OF 3 FEET ABOVE THE GROUND SURFACE. IN ADDITION:
 - A 12-GAUGE GALVANIZED WIRE SHALL BE ATTACHED TO THE TIMBER FROM END TO END ENSURING THAT NEITHER THE WIRE NOR THE 2"x4" TIMBER SHALL BE ATTACHED TO THE SEWER PIPE OR PLUG.
 - THE EXPOSED PORTION OF THE 2"x4" TIMBER SHALL BE PRE-PAINTED TRAFFIC WHITE WITH THE WORDS "GRINDER PUMP SEWER CONNECTION" STENCILED ON WITH BLACK PAINT.
 - THE END OF THE 2"x4" TIMBER SHALL BE PRE-MARKED IN PERMANENT INK WITH THE LENGTH OF THE TIMBER INSTALLED.



DETAIL "A"

CITY INSPECTION REQUIRED PRIOR TO BACKFILL

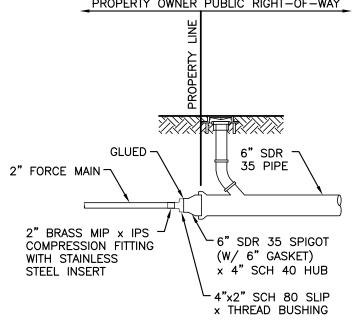

CITY OF EDMONDS

PUBLIC WORKS DEPARTMENT

GRINDER PUMP SERVICE CONNECTION TO GRAVITY SEWER MAIN

REVISION DATE SEPTEMBER 2023

STANDARD **DETAIL** SS-210

APPROVED BY: R. ENGLISH