


PLACE SCORE MARKS EVERY 10'



- NOT TO BE USED IN RIGHT-OF-WAY EXCEPT TO REPAIR EXISTING EXTRUDED CURB, AS APPROVED BY CITY ENGINEER.
- BONDING AGENT IS THE ONLY ATTACHMENT METHOD TO BE USED BETWEEN HMA AND EXTRUDED CURB. 2.
- 3. CONCRETE SHALL BE AIR-ENTRAINED CLASS 3000 PER WSDOT STANDARD SPECIFICATIONS.
- NATIVE AND GRAVEL SUBGRADE SHALL BE COMPACTED TO A MINIMUM OF 95% MAX DENSITY.

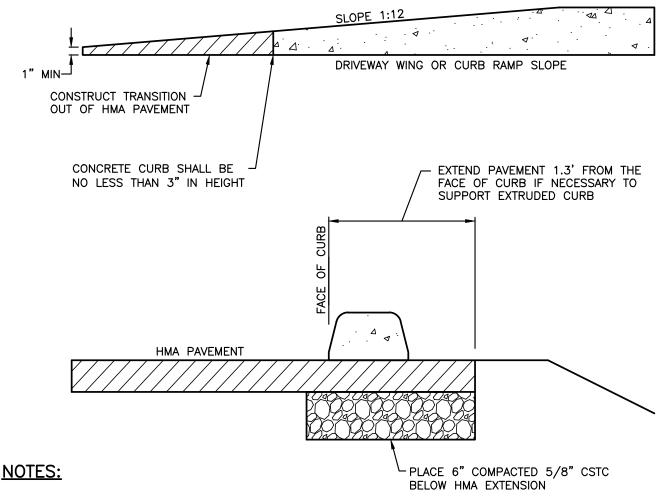

CONCRETE EXTRUDED CURB REVISION DATE **APRIL 2021**

STANDARD DETAIL

APPROVED BY: R. ENGLISH

TR-522